

A modern office space with large glass walls and a glass railing, featuring a desk, chair, and plants. The office is furnished with a desk, a chair, and a large potted plant. The glass railing is made of clear glass panels held together by dark metal frames. The office is located on a mezzanine level, with a staircase visible in the foreground. The ceiling is white with recessed lighting. The floor is made of light-colored tiles. The overall design is minimalist and contemporary.

ONLEVEL

**KAZIWALL**  
ROOM HEIGHT FALL PROTECTION

# KAZIWALL

Room height fall protection for indoor and outdoor use

## KAZIWALL

He is the Knight of Unobtrusiveness. He does not cross limits because he is so steadfast. But he can separate entire worlds, therefore you may want to view him from more than one angle. Next to him, the furniture are taking their positions, the plants bending subserviently in from of him, the wind fluffs up and the balcony is committed to coziness.


He is the Master of the Great Bang but also protects from noise.


Rather a bang than a whimper with **KAZIWALL!**

**KAZIWALL** is the one and only room divider. It is suitable for indoor and outdoor use and available with fall protection. It serves as a room divider across several floors or as a windscreen on balconies or terraces.

## Essential Features

- | Easy and safe installation for single glass fixation method
- | Max ceiling height 3.0 m
- | In case of fall protection, max. load 1.0 kN/m
- | Top mount for both ceiling and floor
- | For glass thickness 16.76 mm, 17.52 mm and 21.52 mm
- | Standard glass width  $\geq 1000$  mm.  
Customized glass width also possible.
- | Prefabricated System

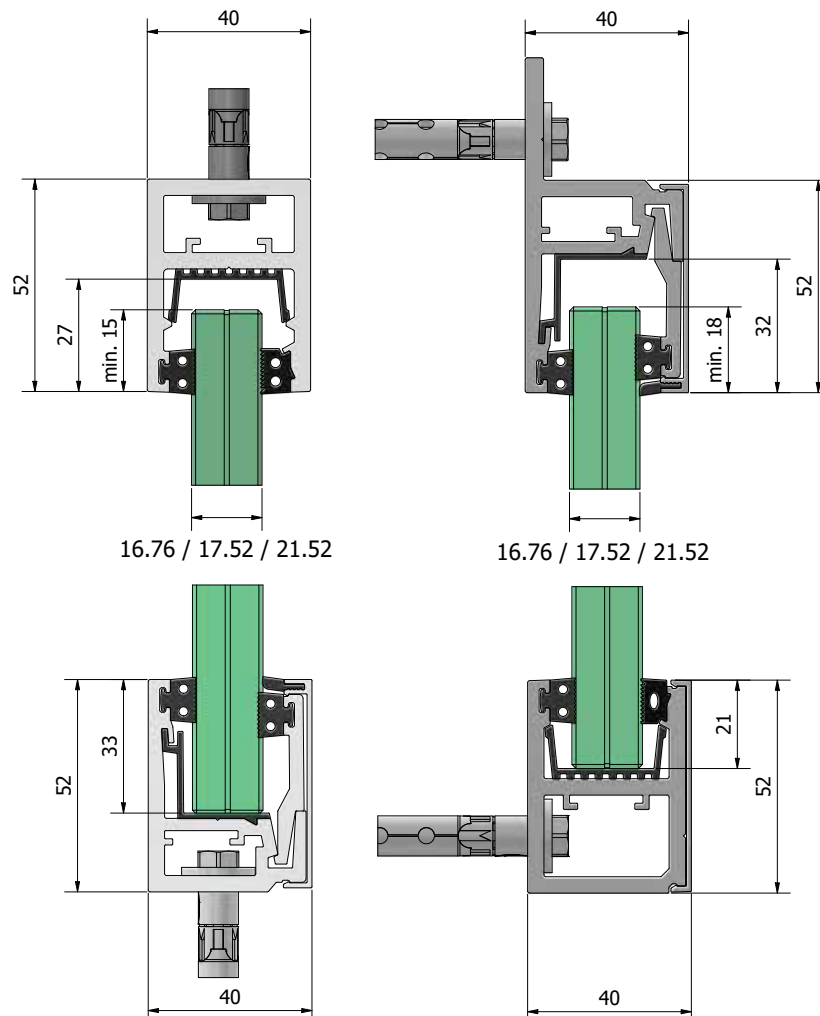



Plug and Play System

Fall protection system

Easy to mount. Prefabricated System.

# KAZIWALL | TOP

## KAZIWALL Top



- | Prefabricated System
- | 1-piece top mount profile
- | Sales unit: 1 piece

		Mill finish	Plain aluminium	RAL coloured
Length	Glass thickness	Art. no.	Art. no.	Art. no.
2500 mm	10,76 mm / 12,76 mm	20.4002.011.10	20.4002.011.11	20.4002.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4005.011.10	20.4005.011.11	20.4005.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4002.017.10	20.4002.017.11	20.4002.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4005.017.10	20.4005.017.11	20.4005.017.13/16/18/19
2500 mm	21,52 mm	20.4002.022.10	20.4002.022.11	20.4002.022.13/16/18/19
5000 mm	21,52 mm	20.4005.022.10	20.4005.022.11	20.4005.022.13/16/18/19

## KAZIWALL Top 2 Pieces



- | Prefabricated System
- | 2-piece top mount profile
- | Sales unit: 1 piece


Note: Intermediate profiles in L=900mm to secure each glass panel separately

		Mill finish	Plain aluminium	RAL coloured
Length	Glass thickness	Art. no.	Art. no.	Art. no.
2500 mm	10,76 mm / 12,76 mm	20.4502.011.10	20.4502.011.11	20.4502.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4505.011.10	20.4505.011.11	20.4505.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4502.017.10	20.4502.017.11	20.4502.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4505.017.10	20.4505.017.11	20.4505.017.13/16/18/19
2500 mm	21,52 mm	20.4502.022.10	20.4502.022.11	20.4502.022.13/16/18/19
5000 mm	21,52 mm	20.4505.022.10	20.4505.022.11	20.4505.022.13/16/18/19

## KAZIWALL Wall profile



- | Prefabricated System
- | Length: 3000 mm
- | Sales unit: 1 piece

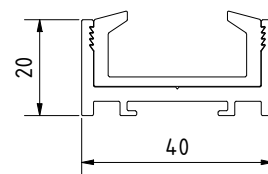


	Mill finish	Plain aluminium	RAL coloured
Glass thickness	Art. no.	Art. no.	Art. no.
10,76 mm / 12,76 mm	20.5003.011.10	20.5003.011.11	20.5003.011.13/16/18/19
16,76 mm / 17,52 mm	20.5003.017.10	20.5003.017.11	20.5003.017.13/16/18/19
21,52 mm	20.5003.022.10	20.5003.022.11	20.5003.022.13/16/18/19

## KAZIWALL Endcap



- | Sales unit: 8 pieces

Colour	Art. no.
mill finish	20.9010.000.10
natural anodized	20.9010.000.11
RAL shiny	20.9010.000.13
RAL struct.	20.9010.000.16
RAL matt	20.9010.000.18
ARMOR RAL	20.9010.000.19



KAZIWALL SIDE



| Prefabricated System  
| Sales unit: 1 piece

		Mill finish	Plain aluminium	RAL coloured
Length	Glass thickness	Art. no.	Art. no.	Art. no.
2500 mm	10,76 mm / 12,76 mm	20.4102.011.10	20.4102.011.11	20.4102.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4105.011.10	20.4105.011.11	20.4105.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4102.017.10	20.4102.017.11	20.4102.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4105.017.10	20.4105.017.11	20.4105.017.13/16/18/19
2500 mm	21,52 mm	20.4102.022.10	20.4102.022.11	20.4102.022.13/16/18/19
5000 mm	21,52 mm	20.4105.022.10	20.4105.022.11	20.4105.022.13/16/18/19

KAZIWALL SIDE 2 Pieces



| Prefabricated System  
| Sales unit: 1 piece


Note: Intermediate profiles in L=900mm  
to secure each glass panel separately

		Mill finish	Plain aluminium	RAL coloured
Length	Glass thickness	Art. no.	Art. no.	Art. no.
2500 mm	10,76 mm / 12,76 mm	20.4602.011.10	20.4602.011.11	20.4602.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4605.011.10	20.4605.011.11	20.4605.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4602.017.10	20.4602.017.11	20.4602.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4605.017.10	20.4605.017.11	20.4605.017.13/16/18/19
2500 mm	21,52 mm	20.4602.022.10	20.4602.022.11	20.4602.022.13/16/18/19
5000 mm	21,52 mm	20.4605.022.10	20.4605.022.11	20.4605.022.13/16/18/19

Fixation anchor Fischer FH II 10/10 S AISI 316



- | For outside use
- | Sales unit: 50 pieces
- | required anchors:  
2.5m: 13, 5m: 25




Art. no.

91.3521.010.30

Fixation anchor Fischer SXRL 10x60 FUS steel zinc plated



- | For inside use
- | Sales unit: 50 pieces
- | required anchors:  
2.5m: 13, 5m: 25



Art. no.

91.3581.060.81

Tape 69



- | Particularly suitable for applications where a transparent, flexible bond is required.
- | For inside use
- | Length: 12 m, Thickness: 3 mm
- | Sales unit: 1 piece



Model 7025		
Width	Glass thickness	Art. no.
5 mm	8 - 8.76 mm	90.7025.008.03
7 mm	10 - 10.76 mm	90.7025.010.03
9 mm	12 - 12.76 mm	90.7025.012.03
13 mm	16.76 - 17.52 mm	90.7025.016.03
17 mm	20.76 - 21.52 mm	90.7025.020.03

Tape 69 mounting tool



- | Sales unit: 1 piece

Model 0100	
For glass thicknesses	Art. no.
8/8.76 and 10/10.76 mm	90.0100.170.08
12/12.76 and 16.76/17.52 mm	90.0100.170.12
16.76/17.52 and 20.76/21.52 mm	90.0100.170.16



KAZIWALL Tool

| Sales unit: 1 piece




Art. no.

90.0100.190.00

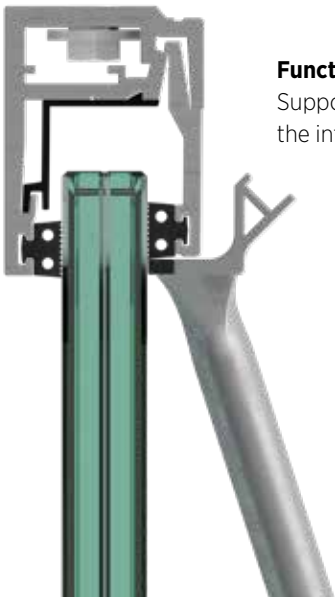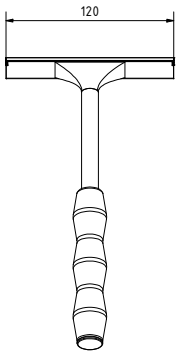

**Function 1:**  
Support tool to hammer-in  
the intermediate profile

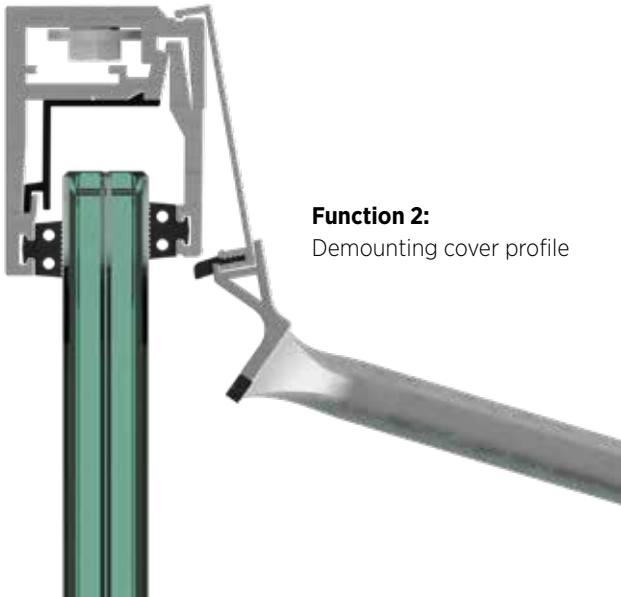

**Function 2:**  
Demounting cover profile

Usage data as per load capacity

Indoor (inside wall)

	Line load	Glass thickness	Height (max)
Private	0.5 kN/m	16.76 mm / 17.52 mm	3000 mm
Public	1.0 kN/m	21.52 mm	3000 mm

Outdoor (as part of exterior wall)

	Line load	Glass thickness	Height (max)	qp(z) max.
Private /Public	1.0 kN/m	21.52mm	2600 mm	1.41 kN/m2
Private /Public	1.0 kN/m	21.52 mm	3000 mm	0.93 kN/m2

\*All glass calculations are done for laminated toughened glass (ESG)



A modern interior staircase with wide, light-colored concrete steps. The staircase is enclosed by a glass railing system with wooden handrails. The glass panels are held in place by metal brackets. The wooden handrails are mounted on the wall and the glass. The staircase is set against a white wall. There are several potted plants on the steps and on the floor. The lighting is warm and modern, with recessed ceiling lights and a small pendant light. The overall aesthetic is clean, minimalist, and contemporary.

# ONLEVEL

**ONLEVEL Ltd.** | Units 7, Alexandria Court | Alexandria Drive  
Ashton Commerce Park | Ashton-under-Lyne | Lancashire OL7 0QN | United Kingdom  
T +44 0161 804 9500 | F +44 0161 804 9505 | [info@onlevel-uk.com](mailto:info@onlevel-uk.com) | [www.onlevel.com](http://www.onlevel.com)