



ONLEVEL

TL60**30**  
SYSTEM FOR FRAMELESS  
ALL-GLASS BALUSTRADES

# TL-6030

3.0 kN Top Mount

## Fat Sister.

The TL-6030 U-profile HD is not only cost-effective. There is much more to it. This profile is especially popular for completely concealed installations. When used together with the structural connection profiles, its application versatility increases many times over.

As a matter of fact, the profile is suited both for interior and exterior applications. It can withstand a linear load of 3.0 kN and is appropriate for glass thicknesses between 21.52 mm and 31.52 mm.

## Essential Features




- | Slimline, elegant design and low-maintenance
- | ONLEVEL FLEXFIT Glass Adjustment Tool
- | Drainage holes
- | For glass thicknesses between 21.52 - 31.52 mm
- | For applications in the public area



TESTED  
according to  
BS6180

CE EN1090-1  
EN1090-3  
EXC 3

riba  
product  
selector

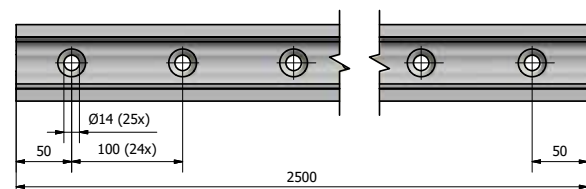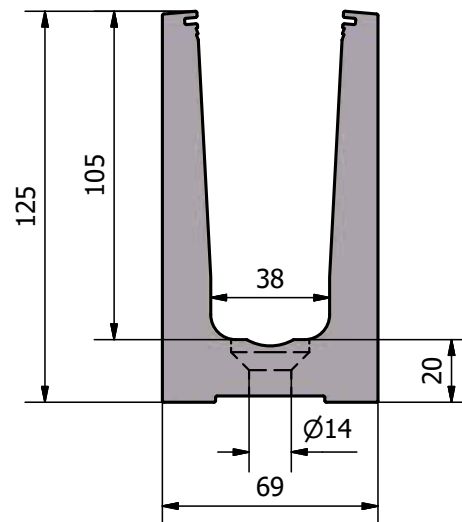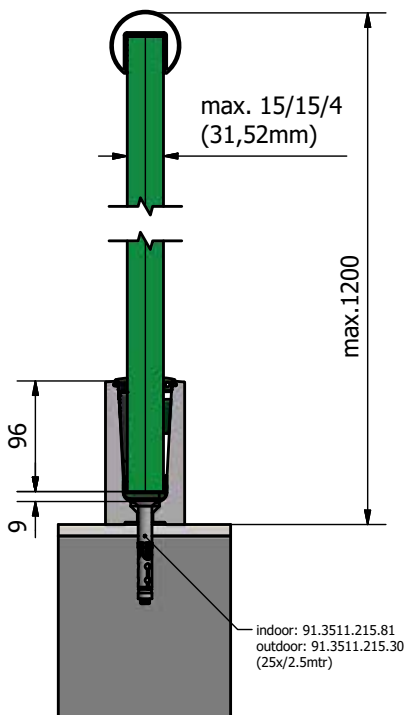



Unlimited application  
versatility

Fat but still nearly invisible



Especially for applications in  
the public area



Top mount



# TL-6030 | 3.0 KN TOP MOUNT

## Glass profile




- | Height: 125 mm
- | Width 69 mm
- | Sales unit: 1 piece

Model 6030	Plain aluminium
Length	Art. no.
2500	10.6030.002.11

## Inside corner / outside corner 90°



- | Side length inside: 131 mm
- | Side length outside: 200 mm
- | Sales unit: 1 piece




Model 6030	Plain aluminium
	Art. no.
	10.6030.390.11

## End cap, left/right



- | For use on the left and right
- | Sales unit: 1 piece




Model 6030	Plain aluminium
Application	Art. no.
left/right	10.6030.490.11

## Fischer fixing anchor FH II 12/15 SK



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 25 pieces
- | Sales unit: 25 pieces




Model 3511	zinc-plated steel (inside)	AISI 316 (exterior)
	Art. no.	Art. no.
	91.3511.215.81	91.3511.215.30

# TL-6030 | 3.0 KN TOP MOUNT

## Fixing anchor steel



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 25 pieces
- | M12 x 40 mm
- | Sales unit: 17 pieces



Model 6030	zinc-plated steel (inside)	AISI 316 (exterior)
	Art. no.	Art. no.
	91.6030.040.81	91.6030.040.30

## FLEXFIT 3.0 kN



- | Fine adjustment of glass panes
- | For glass thicknesses between 21.52 - 31.52 mm
- | Adjustment of up to 34 mm in relation to the vertical axis
- | Pay attention to the right glass thickness!

Length		5000 mm
Glass thickness	Wedge colour	Art. no.
10/10/4 (21.52 mm)	blue	90.0505.322.00
12/12/4 (25.52 mm)	red	90.0505.326.00
15/15/4 (31.52 mm)	green	90.0505.332.00





# ONE SIZE. ONE LEVEL.

Our end caps for staircases can be easily adjusted to the desired dimension. The lines on the rear of the end cap facilitate cutting it to shape and adjusting it to any desired angle.

Cut to Size





# ONLEVEL

**ONLEVEL Ltd.** | Unit 7, Alexandria Court | Alexandria Drive  
Ashton Commerce Park | Ashton-under-Lyne | Lancashire OL7 0QN | United Kingdom  
T +44 0161 804 9500 | F +44 0161 804 9505 | [info@onlevel-uk.com](mailto:info@onlevel-uk.com) | [www.onlevel.com](http://www.onlevel.com)