

ONLEVEL





TL30**80**, TL60**80**, TL60**81**
SYSTEM FOR FRAMELESS
ALL-GLASS BALUSTRADES


0.5 kN Top Mount

- For fall protection indoors with a max. railing height of 1100 mm.
- The ideal solution for fall protection in private indoor areas.
- As a separating system for railings without fall protection to ensure maximum design flexibility.

- | Slimline, elegant design and low-maintenance
- | **ONLEVEL FLEXFIT** Glass Adjustment Tool
- | Cover (optional)
- | Extension pin channels
- | For use with Top Cover 2.0 kN
- | For glass thicknesses between 12 - 21.52 mm
- | Not suitable for mounting on wood

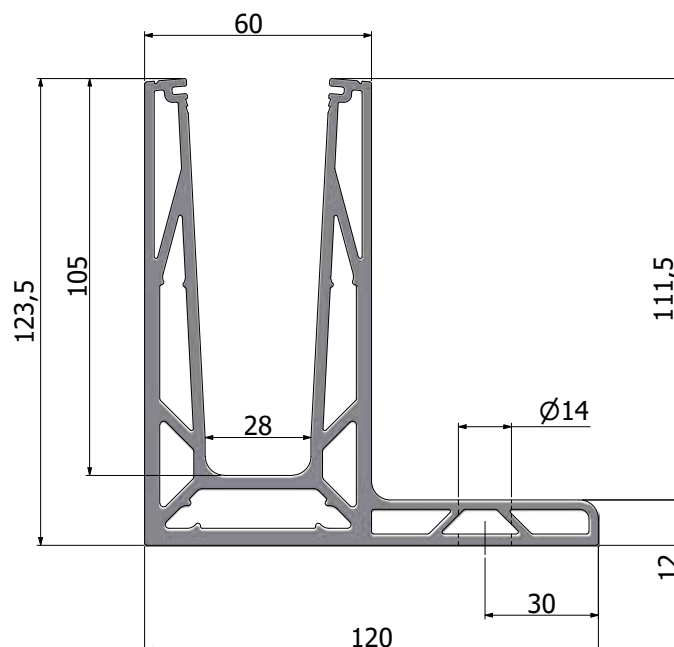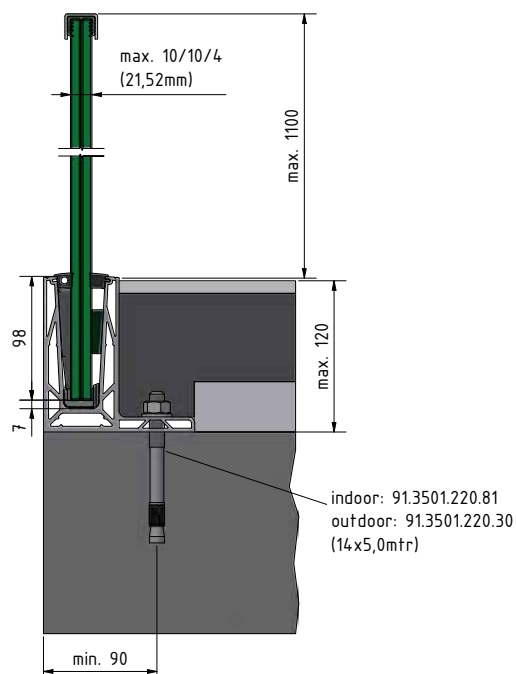

Lightweight profile –
therefore more economic

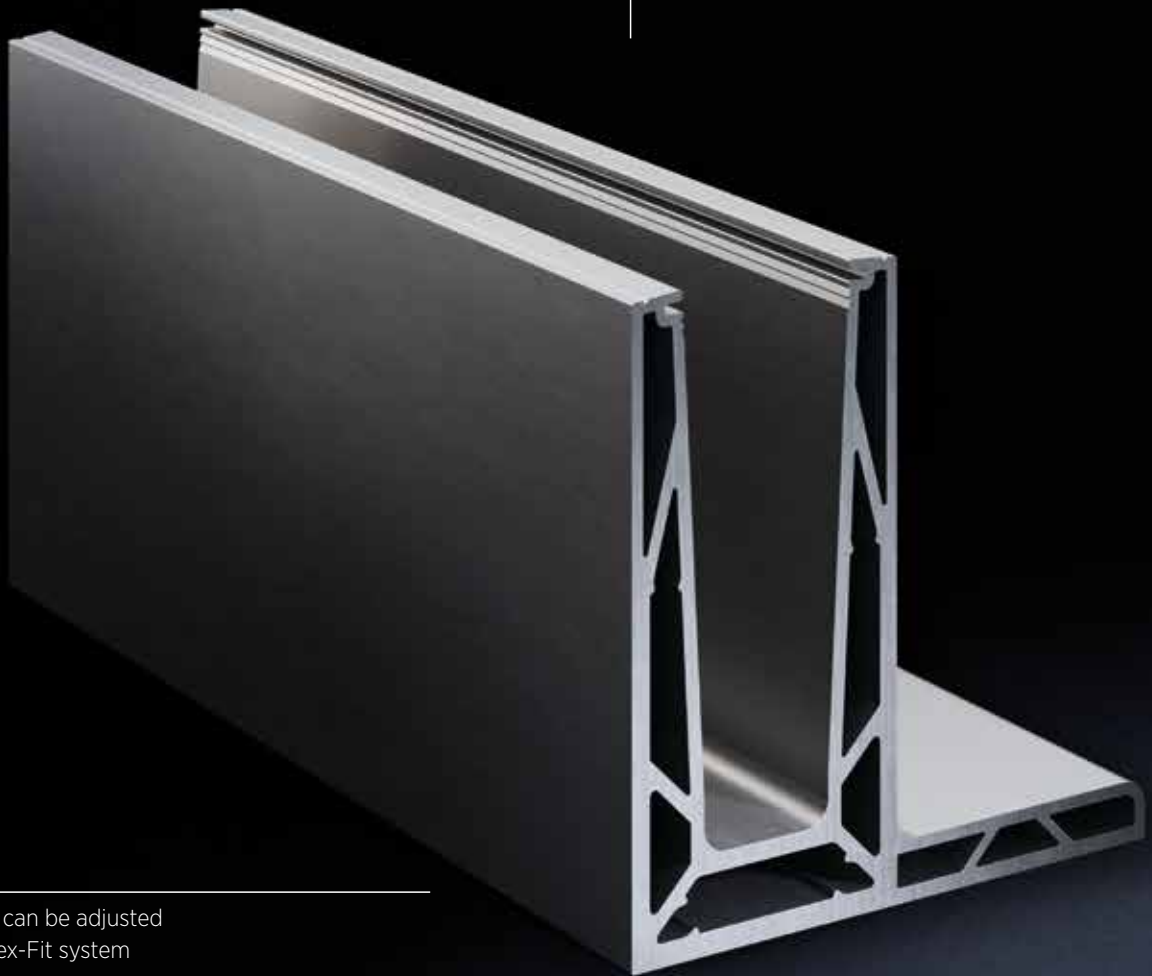

The glass can be adjusted
via the Flex-Fit system




Top mount

TL-3080 | 0.5KN TOP MOUNT

Glass profile



- | Height: 124 mm
- | Width: 120 mm
- | Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5mtr	10.3080.005.10	10.3080.005.11	10.3080.005.13/16/18/19

Inside corner 90°




- | Side length inside: 80 mm
- | Side length outside: 200 mm
- | Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.3080.300.10	10.3080.300.11	10.3080.300.13/16/18/19

Outside corner 90°

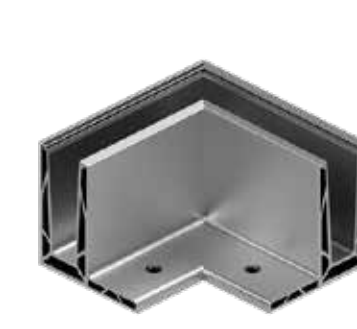

- | Side length inside: 80 mm
- | Side length outside: 200 mm
- | Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.3080.350.10	10.3080.350.11	10.3080.350.13/16/18/19

End cap, left



- | For use on the left
- | Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.3080.400.10	10.3080.400.11	10.3080.400.13/16/18/19

TL-3080 | 0.5KN TOP MOUNT

End cap, right



- | For use on the right
- | Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.3080.450.10	10.3080.450.11	10.3080.450.13/16/18/19

Fischer fixing anchor FAZ II 12/20



- | Finish interior application: Zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 7 pieces
- | M12
- | Sales unit: 20 pieces




Model 3501	Zinc-plated steel (inside)	AISI 316 (exterior)
Art. no.	Art. no.	Art. no.
	91.3501.220.81	91.3501.220.30

Mounting set for steel



- | Finish interior application: Zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 7 pieces
- | M12 x 50 mm
- | Sales unit: 7 pieces




Model 3080	Zinc-plated steel (inside)	AISI 316 (exterior)
Art. no.	Art. no.	Art. no.
	91.3080.050.81	91.3080.050.30

Extension pin



- | Length: 40 mm
- | Diameter: Ø 6 mm
- | Sales unit: 8 pieces



Model 7001	AISI 316 (inside & outside)
Art. no.	Art. no.
	90.7001.640.31

TL-3080 | 0.5KN TOP MOUNT

3.0 kN Top Cover, 3 mm



| Width: 2 mm
| 3.0 kN, and for the 6020 and 6021 profiles
| Sales unit: 1 piece



Model 8030	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	90.8030.035.10	90.8030.035.11	90.8030.035.13/16/18/19

3.0 kN Top Cover, 10 mm



| Width: 8 mm
| 3.0 kN, and for the 6020 and 6021 profiles
| Sales unit: 1 piece



Model 8030	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	90.8030.105.10	90.8030.105.11	90.8030.105.13/16/18/19

3.0 kN Top Cover, 20 mm



| Width: 18 mm
| 3.0 kN, and for the 6020 and 6021 profiles
| Sales unit: 1 piece



Model 8030	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	90.8030.205.10	90.8030.205.11	90.8030.205.13/16/18/19

FLEXFIT 1.0 kN



| Fine adjustment of glass panes
| For glass thicknesses between 12 - 21.52 mm
| Adjustment of up to 34 mm in relation to the vertical axis

Pay attention to the right glass thickness!


Length		2500 mm	5000 mm	25 mtr
Glass thickness	Wedge colour	Art. no.	Art. no.	Art. no.
12 mm	black	-	90.0505.112.00	-
6/6/2 (12.76 mm)	red	90.0502.113.00	90.0505.113.00	90.0525.113.00
6/6/4 (13.52 mm)	grey	-	90.0505.114.00	-
8/8/2 (16.76 mm)	red	90.0502.117.00	90.0505.117.00	90.0525.117.00
8/8/4 (17.52 mm)	green	90.0502.118.00	90.0505.118.00	90.0525.118.00
10/10/2 (20.76 mm)	red	90.0502.121.00	90.0505.121.00	90.0525.121.00
10/10/4 (21.52 mm)	green	90.0502.122.00	90.0505.122.00	90.0525.122.00

TL-3080 | 0.5KN TOP MOUNT

ONLEVEL Combi Tool



- | For FLEXFIT Glass Adjustment Tool
- | Zinc-plated steel

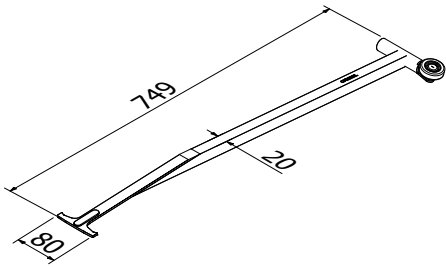


Model 0100	Art. no.
	90.0100.100.00

ONLEVEL FLEXFIT Tool



- | For FLEXFIT Glass Adjustment Tool
- | Zinc-plated steel




Model 0100	Art. no.	H
0,5 kN	90.0100.112.00	105 mm
1.0 & 2.0 kN	90.0100.110.00	140 mm
Deep	90.0100.115.00	165 mm

3.0 kN Floor Connect



- | Width 20 mm
- | Sales unit: 1 piece



Model 8130	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	90.8130.205.10	90.8130.205.11	90.8130.205.13/16/18/19

TL-6080

0.74 kN Top Mount


Glass profile on diet.

The TL-6080 U Profile is not only cost-effective. It is also an intelligent onward development of the TL-6020 Profile. In addition, it is much slimmer, has increased mounting distances and an extra low profile height of only 125 mm. Therefore, this product is not only less expensive to mount but also offers your customer an unobstructed view from their balcony.

As a matter of fact, the profile is suited both for interior and exterior applications. It can withstand a linear load of more than 0.74 and is appropriate for glass thicknesses between 12 mm and 21.52 mm.

Essential Features

- | Slimline, elegant design and low-maintenance
- | **ONLEVEL** FLEXFIT Glass Adjustment Tool
- | Top Cover (optional)
- | Extra low profile height of only 125 mm
- | For glass thicknesses between 12 - 21.52 mm

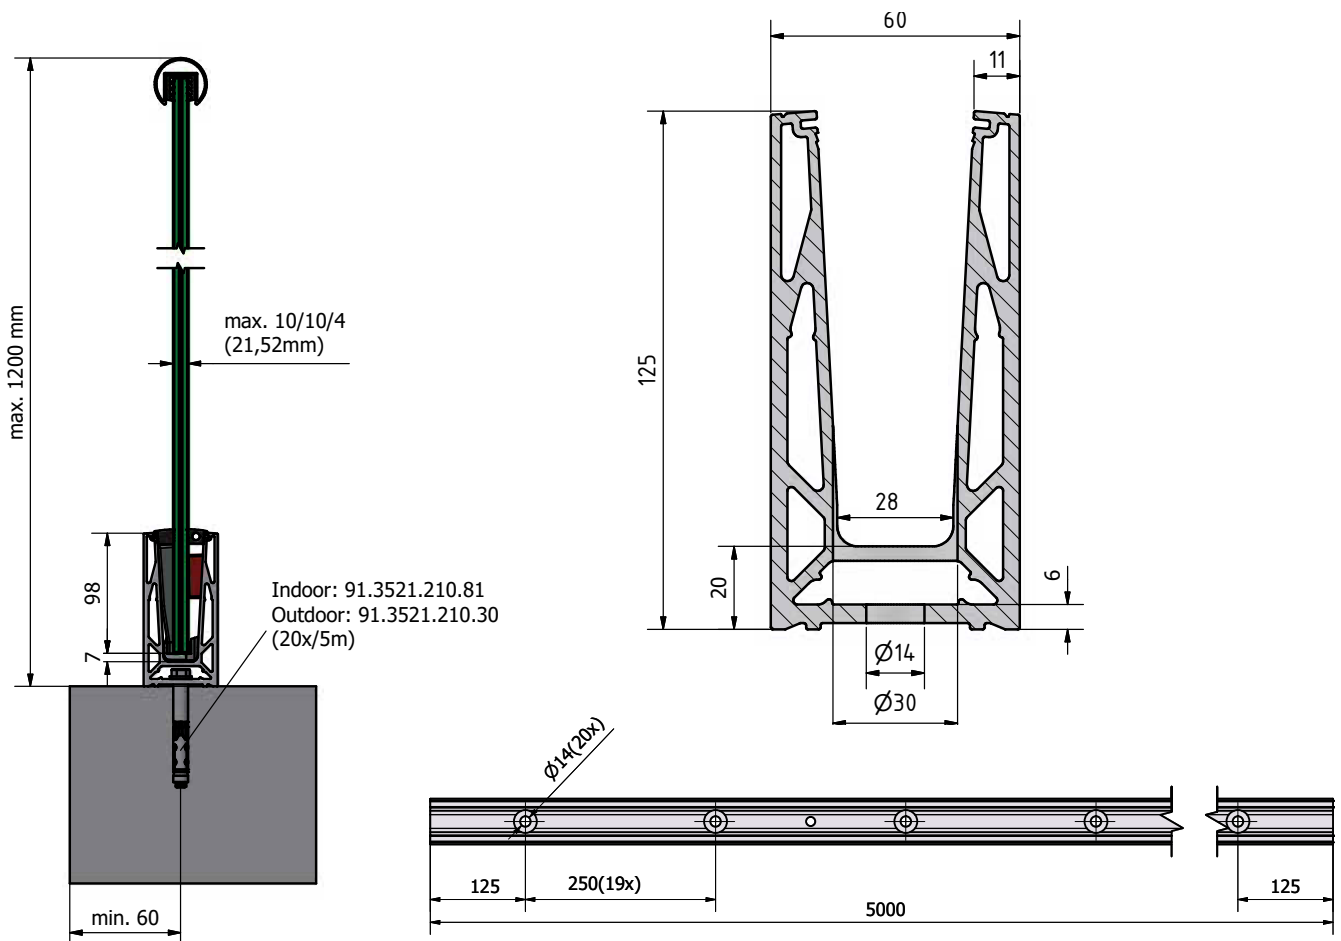




Extra low profile height
of only 125 mm



Hollow profile, therefore
more lightweight and more
economic

 Top mount



TL-6080 | 0.74 KN TOP MOUNT

Glass profile




| Height: 125 mm
| Width: 60 mm
| Sales unit: 1 piece

Model 6080	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
2500	10.6080.002.10	10.6080.002.11	-
5000	10.6080.005.10	10.6080.005.11	10.6080.005.13/16/18/19

Inside corner / outside corner 90°



| Side length inside: 140 mm
| Side length outside: 200 mm
| Sales unit: 1 piece




Model 6080	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6080.390.10	10.6080.390.11	10.6080.390.13/16/18/19

End cap, left/right



| For use on the left and right
| Sales unit: 1 piece




Model 6080	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left/right	10.6080.490.10	10.6080.490.11	10.6080.490.13/16/18/19

Spacer



You do not have any drainage options on your balcony?!
So that you do not need to install a dam on your balcony, you can simply mount the spacers beneath your profile.

| Inner drill hole: Ø 14 mm
| Sales unit: 13 pieces



Model 6080	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6080.500.10	10.6080.500.11	10.6080.500.13/16/18/19

TL-6080 | 0.74 KN TOP MOUNT

Extension pin



- | Length: 40 mm
- | Diameter: Ø 6 mm
- | Sales unit: 8 pieces




Model 7001	AISI 316 (inside & outside)
Art. no.	
90.7001.640.31	



Fischer fixing anchor FH II 12/10



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 5000mm: 20 pieces
- | Sales unit: 50 pieces




Model 3521	zinc-plated steel (inside)	AISI 316 (exterior)
Art. no.		Art. no.
91.3521.210.81		91.3521.210.30

Fischer ixing anchor FIS A M12x120



- | Suitable mortar: 91.3000.010.00
- | V4A (outside)
- | Required number per 5000mm: 20 pieces
- | Sales unit = 10 pieces




Model 3551	V4A (outside)
Art. no.	
91.3551.212.30	

Onlevel fixing anchor SZ-S 12-10



- | Finish interior application: zinc-plated steel (interior)
- | Finish exterior application: V4A (outside)
- | Required number per 5000mm: 20 pieces
- | Sales unit: 50 pieces




Model 3621	zinc-plated steel (interior)	V4A (outside)
Art. no.		Art. no.
91.3621.210.81		91.3621.210.30

TL-6080 | 0.74 KN TOP MOUNT

Mounting set for steel



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 5000 mm: 20 pieces
- | M12 x 40 mm
- | Sales unit: 10 piece



Model 6080	zinc-plated steel (inside)	AISI 316 (exterior)
	Art. no.	Art. no.
	91.6080.040.81	91.6080.040.30

FLEXFIT 1.0 kN



- | Fine adjustment of glass panes
- | For glass thicknesses between 12 - 21.52 mm
- | Adjustment of up to 34 mm in relation to the vertical axis
- | Pay attention to the right glass thickness!

Length		2500 mm	5000 mm	25 mtr
Glass thickness	Wedge colour	Art. no.	Art. no.	Art. no.
12 mm	black	-	90.0505.112.00	-
6/6/4 (13.52 mm)	grey	-	90.0505.114.00	-
8/8/4 (17.52 mm)	green	90.0502.118.00	90.0505.118.00	90.0525.118.00
10/10/4 (21.52 mm)	green	90.0502.122.00	90.0505.122.00	90.0525.122.00



TL-6081

0.74 kN Side Mount



Glass profile with slim hips.

The TL-6081 U Profile is the intelligent onward development of the TL-6021 Profile. It is much slimmer and stands out due to its extra low profile height of only 125 mm. What is so special about it is the fact that the mounting distances have been increased. That makes the product much faster and cheaper to mount.

As a matter of fact, the profile is suited both for interior and exterior applications. It can withstand a linear load of up to 1.0 kN and is appropriate for glass thicknesses between 12 mm and 21.52 mm.

Essential Features

- | Slimline, elegant design and low-maintenance
- | ONLEVEL FLEXFIT Glass Adjustment Tool
- | Drainage holes
- | Cover (optional)
- | For use with 3.0 kN Top Cover
- | Extra low profile height of only 125 mm
- | For glass thicknesses between 12 mm and 21.52 mm

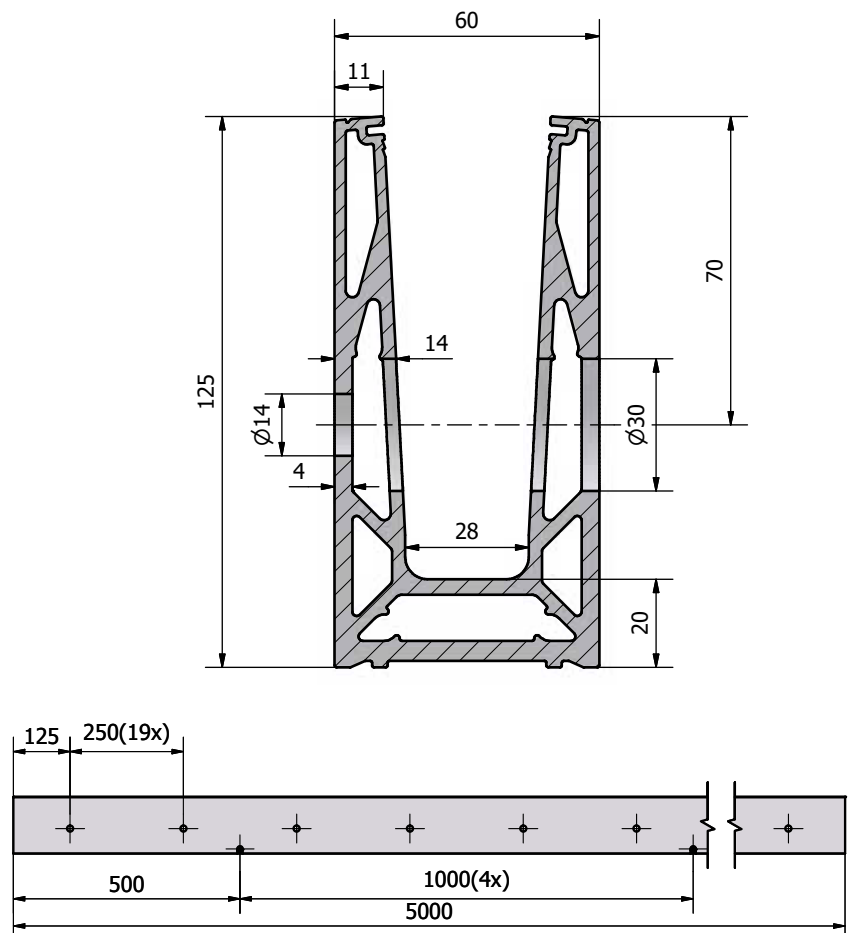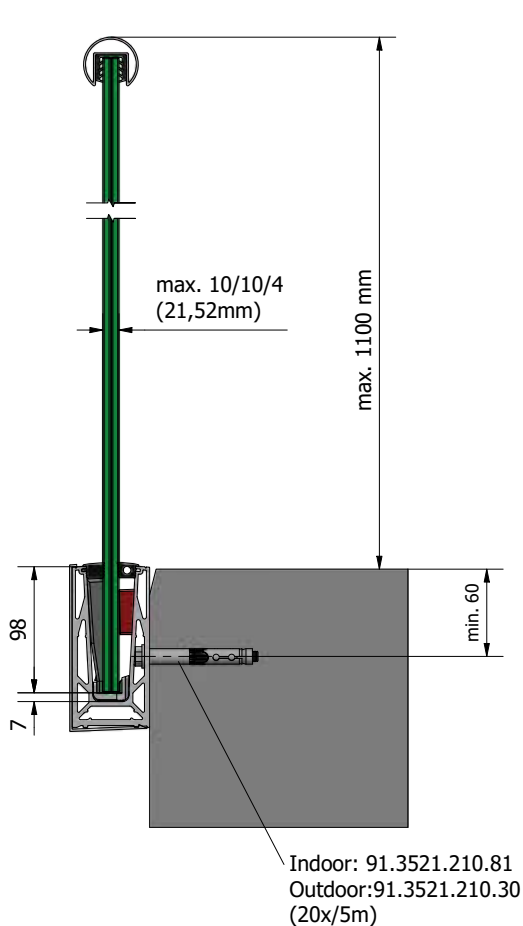



Extra low profile height
of only 125 mm



Side mount

Integrated multifunctional
sophisticated chamber for
enabling larger drilling distances

TL-6081 | 0.74KN SIDE MOUNT

Glass profile




- | Height: 125 mm
- | Width 60 mm
- | Sales unit: 1 piece

Model 6081	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	10.6081.005.10	10.6081.005.11	10.6081.005.13/16/18/19

Inside corner 90°



- | Side length inside: 140 mm
- | Side length outside: 200 mm
- | Sales unit: 1 piece




Model 6081	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6081.300.10	10.6081.300.11	10.6081.300.13/16/18/19

Outside corner 90°



- | Side length inside: 140 mm
- | Side length outside: 200 mm
- | Sales unit: 1 piece




Model 6081	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6081.350.10	10.6081.350.11	10.6081.350.13/16/18/19

Cover Cap



- | With mounting strips
- | For use with a Cover Cap, end caps must be ordered separately.
- | Sales unit: 1 piece




Model 6081	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	10.6081.205.10	10.6081.205.11	10.6081.205.13/16/18/19

TL-6081 | 0.74KN SIDE MOUNT

End cap without Cover Cap, left



| For use on the left
| Sales unit: 1 piece




Model 6081	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.6081.400.10	10.6081.400.11	10.6081.400.13/16/18/19

End cap without Cover Cap, right



| For use on the right
| Sales unit: 1 piece




Model 6081	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.6081.450.10	10.6081.450.11	10.6081.450.13/16/18/19

End cap with Cover Cap, left



| For use on the left
| Sales unit: 1 piece




Model 6081	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.6081.410.10	10.6081.410.11	10.6081.410.13/16/18/19

End cap with Cover Cap, right



| For use on the right
| Sales unit: 1 piece




Model 6081	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.6081.460.10	10.6081.460.11	10.6081.460.13/16/18/19

TL-6081 | 0.74KN SIDE MOUNT

Spacer



- | Thickness: 15 mm
- | Sales unit: 13 pieces

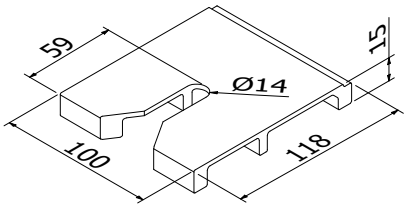


Model 6081	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6081.500.10	10.6081.500.11	10.6081.500.13/16/18/19

Blanking plug



- | Required number per 5000 mm: 20 pieces
- | Sales unit: 10 pieces




Model 7000	Plastic	
Colour	Diameter	Art. no.
white	30 mm	90.7000.030.40
black	30 mm	90.7000.030.41
grey	30 mm	90.7000.030.45

Extension pin



- | Length: 40 mm
- | Diameter: Ø 6 mm
- | Sales unit: 8 pieces




Model 7001	AISI 316 (inside & outside)
	Art. no.
	90.7001.640.31

Fischer fixing anchor FH II 12/10



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 5000mm: 20 pieces
- | Sales unit: 50 pieces




Model 3521	zinc-plated steel (inside)	AISI 316 (exterior)
	Art. no.	Art. no.
	91.3521.210.81	91.3521.210.30

TL-6081 | 0.74KN SIDE MOUNT

Onlevel fixing anchor SZ-S 12-10

ONLEVEL


- | Finish interior application: zinc-plated steel (interior)
- | Finish exterior application: V4A (outside)
- | Required number per 5000mm: 20 pieces
- | Sales unit: 50 pieces



Model 3621	zinc-plated steel (interior)	V4A (outside)
	Art. no.	Art. no.
	91.3621.210.81	91.3621.210.30

Mounting set for steel

- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 5000 mm: 20 pieces
- | M12 x 40 mm
- | Sales unit: 10 piece



Model 6081	zinc-plated steel (inside)	AISI 316 (exterior)
	Art. no.	Art. no.
	91.6081.040.81	91.6081.040.30

FLEXFIT 1.0 kN



- | Fine adjustment of glass panes
- | For glass thicknesses between 12 - 21.52 mm
- | Adjustment of up to 34 mm in relation to the vertical axis
- | Pay attention to the right glass thickness!

Length		2500 mm	5000 mm	25 mtr
Glass thickness	Wedge colour	Art. no.	Art. no.	Art. no.
12 mm	black	-	90.0505.112.00	-
6/6/4 (13.52 mm)	grey	-	90.0505.114.00	-
8/8/4 (17.52 mm)	green	90.0502.118.00	90.0505.118.00	90.0525.118.00
10/10/4 (21.52 mm)	green	90.0502.122.00	90.0505.122.00	90.0525.122.00



ONLEVEL Ltd. | Units 7, Alexandria Court | Alexandria Drive
Ashton Commerce Park | Ashton-under-Lyne | Lancashire OL7 0QN | United Kingdom
T +44 0161 804 9500 | F +44 0161 804 9505 | info@onlevel-uk.com | www.onlevel.com