


The 80s

1.0 kN Top and Side Mount

ONLEVEL
UNITED KINGDOM

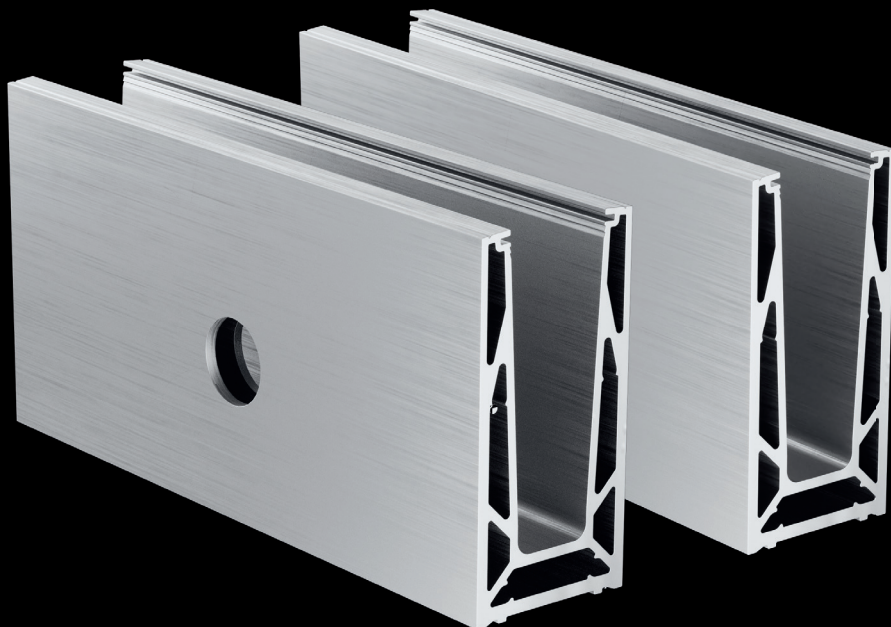



The TL-6080 U Profile is not only cost-effective. It is also an intelligent onward development of the TL-6020 Profile. In addition, it is much slimmer, has increased mounting distances and an extra low profile height of only 125 mm. Therefore, this product is not only less expensive to mount but also offers your customer an unobstructed view from their balcony. As a matter of fact, the profile is suited both for interior and exterior applications. It can withstand a linear load of more than 1.0 and is appropriate for glass thicknesses between 12 mm and 21.52 mm.



TL-6080

Essential Features

- | Slimline, elegant design and low-maintenance
- | ONLEVEL FLEXFIT Glass Adjustment Tool
- | Top Cover (optional)
- | Extra low profile height of only 125 mm
- | For glass thicknesses between 12 - 21.52 mm

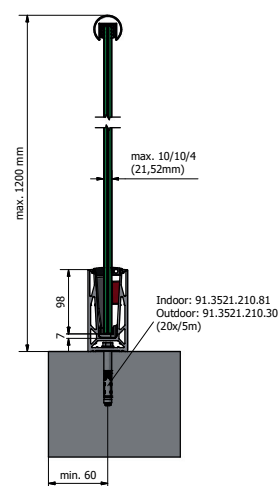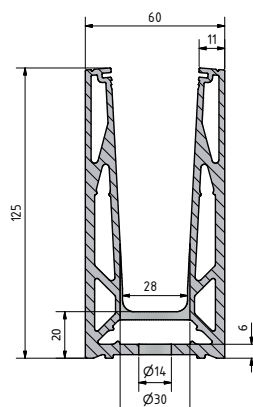



The TL-6081 U Profile is the intelligent onward development of the TL-6021 Profile. It is much slimmer and stands out due to its extra low profile height of only 125 mm. What is so special about it is the fact that the mounting distances have been increased. That makes the product much faster and cheaper to mount. As a matter of fact, the profile is suited both for interior and exterior applications. It can withstand a linear load of up to 1.0 kN and is appropriate for glass thicknesses between 12 mm and 21.52 mm.



TL-6081

Essential Features

- | Slimline, elegant design and low-maintenance
- | ONLEVEL FLEXFIT Glass Adjustment Tool
- | Drainage holes
- | Cover (optional)
- | For use with 3.0 kN Top Cover
- | Extra low profile height of only 125 mm
- | For glass thicknesses between 12 mm and 21.52 mm

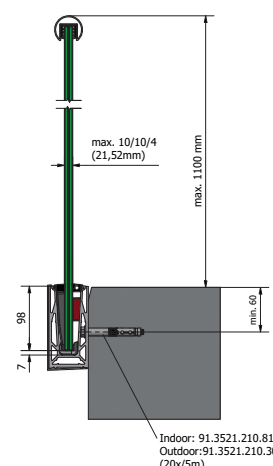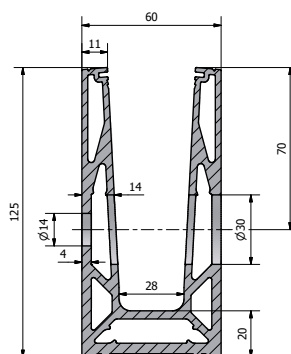

CONTACT US TODAY AND LET US ADVISE YOU.

CALL US ON: +49 (0)2822 97514-0

ODER SENDE UNS EINFACH EINE MAIL AN: SALES@ONLEVEL.COM

WE'RE ONLEVEL

0.5 kN Top Mount



ON LEVEL
UNITED KINGDOM



This model is the rebellious version of the popular 3010. It's not only lighter, but also cooler. The design is so fresh that it even amazes robots. And yes, we didn't just think about the outer beauty, but also about the inner values.

- For fall protection indoors with a max. railing height of 1100 mm.
- The ideal solution for fall protection in private indoor areas.
- As a separating system for railings without fall protection to ensure maximum design flexibility.



TL-3080

- | Slimline, elegant design and low-maintenance
- | **ONLEVEL FLEXFIT** Glass Adjustment Tool
- | Cover (optional)
- | Extension pin channels
- | For use with Top Cover 2.0 kN
- | For glass thicknesses between 12 - 21.52 mm
- | Not suitable for mounting on wood

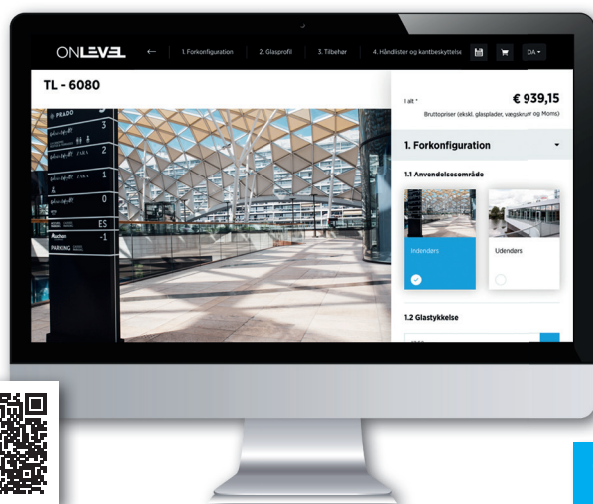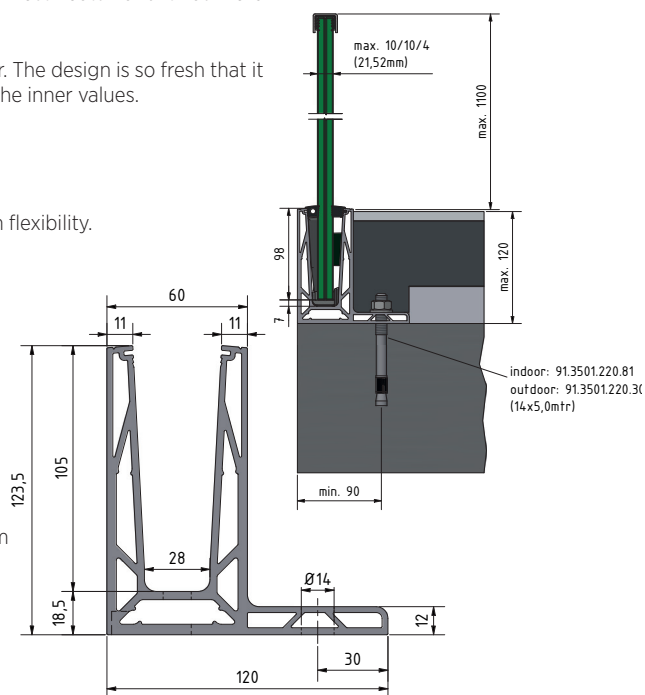 **ADD ACCESSORIES**

OVERVIEW OF AVAILABLE PROFILES

 **DIRECT ORDERING OF THE
DESIRED RAL COLOR POSSIBLE**

CONFIGURE IT OUT!

THE RAILING CONFIGURATOR FROM ONLEVEL.

WE'RE ON LEVEL