

ONLEVEL

**ONLY
YOU**

ANY COLOUR, ANY SIZE
WITHIN 15 DAYS

SUNVIEW
OUTDOOR SLIDING DOOR SYSTEM

NEW: ONLINE CONFIGURATOR



Child-proof Lock

Locking oneself out from outside is impossible.

Different surface finishes

Mill finish or plain anodised aluminium, RAL7016, RAL9007, DB703 or powder-coated in your preferred colour (except for the bottom rail)

Innovative Drainage



SUNVIEW - LET THE SUNSHINE IN!

Summer, sun and sunshine!

The sun comes up with Sunview!

Our Innovation Crew has developed **SUNVIEW** with great dedication – a glass sliding door system with an unparalleled charm. **SUNVIEW** attractively and revealingly glistens in the sun – and its dimensions and advantages are just as appealing.

Essential Features

- | For 10 mm glass
- | Available as finished sets or ready-made products
- | Aluminium finish or powder-coated
- | Max. width/door: 1500 mm
- | Max. height/door: 2600 mm
- | Max. width: 15000 mm
- | Simple mounting
- | No glass processing required
- | Wind load tested according to DIN 18008

Of course, **SUNVIEW** comes with its wind load tested as per DIN 18008 and is available as ready-made set or by the metre (for assembly by the customer). Different finishes are available in all conceivable colours. In addition, the handles made of massive V4A stainless steel are resistant to the harshest environments.


Our Colour Selection




.11 Plain aluminium



.13 RAL glossy



.16 RAL structured matt



.18 RAL matt



.19 **ARMOR RAL**

COLOUR OF YOUR CHOICE?

Of course we deliver in your RAL or NCS colour of choice.

SUNVIEW | AND WHY IT IS SO DAMN GOOD

SUNVIEW THE BEETLE -

Unique alignment of the wall profile.

With the aid of the Beetle, the wall profile can be aligned in the right position within 5 seconds. Afterwards, only tighten the screws and you're done.



SUNVIEW THE LOCKING SYSTEM -

Unique child-proof lock.

The system can only be closed when deliberately intended. Locking oneself out from outside is not possible. In this way, even the smallest ones are not left outside by accident.



SUNVIEW THE FLOOR RAIL -

As a matter of fact, we've also put some thought into drainage. All floor profiles are plain anodised and have milled cut-outs for the required drainage.



SUNVIEW THE DOOR -

Unique installation.

Quick and clean mounting thanks to prepared adhesive tape inside the aluminium profile. No silicone and no glass processing required.




ONLEVEL



1. SunView



Glass Sliding Wall



Sum *

Gross prices (excl. glass panels, wall screws and VAT)

1. SunView



**DIRECT ORDERING OF THE
DESIRED RAL COLOR POSSIBLE**




CHOICE OF OPENING DIRECTION



**PERSONALIZATION THROUGH
LOCKING SYSTEM AND DRAFT SHIELD**



**DOWNLOAD FUNCTION WITH ALL DIMENSIONS
AND THE REQUIRED GLASS PROCESSING**

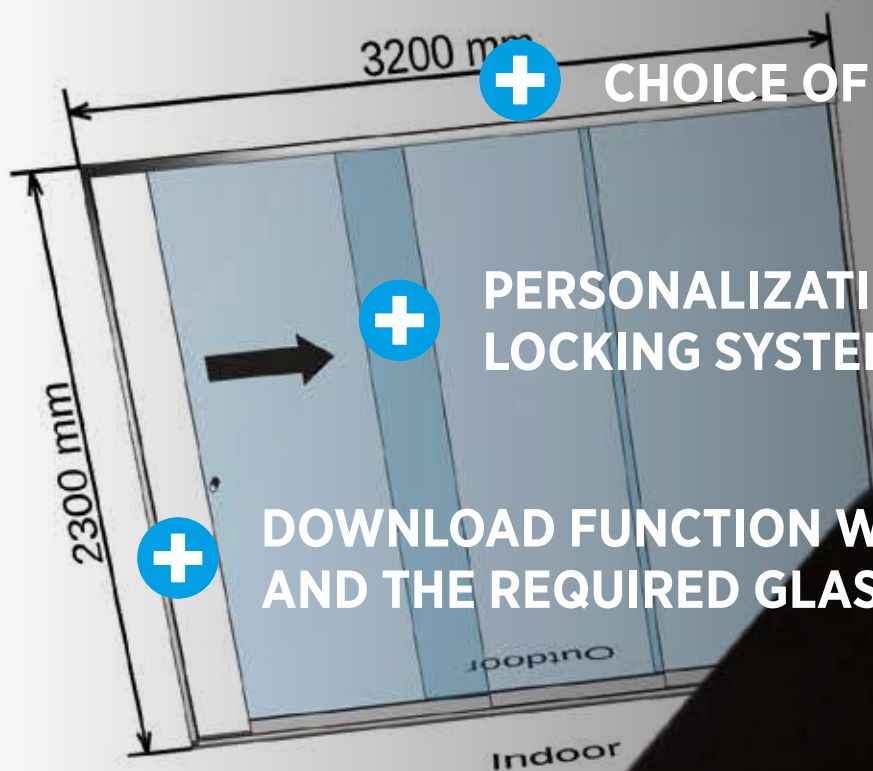

CONFIGURE IT OUT!

THE SUNVIEW CONFIGURATOR FROM ONLEVEL.

WWW.ONLEVEL-SHOP.COM

THE BEETLE.

As all **ONLEVEL** products, also **SUNVIEW** can be mounted so much easier and faster. The innovative **“THE BEETLE”** mounting tool makes installation as easy as can be; the wall profile can be aligned into the right position in a matter of seconds.

The wall profile also ensures a neat finish on the sides. The brushes protect and surround the glass.

In addition, the system is equipped with an anti-lift device which keeps the door from accidentally sliding out of the top guide.

Anti-lift Device

The door always remains within the guide.


Brushes

protect the glass and let it slide into its position silently.

10 mm tempered glass

The Beetle

For a fast adjustment of the wall profile. No need to search for the right position.

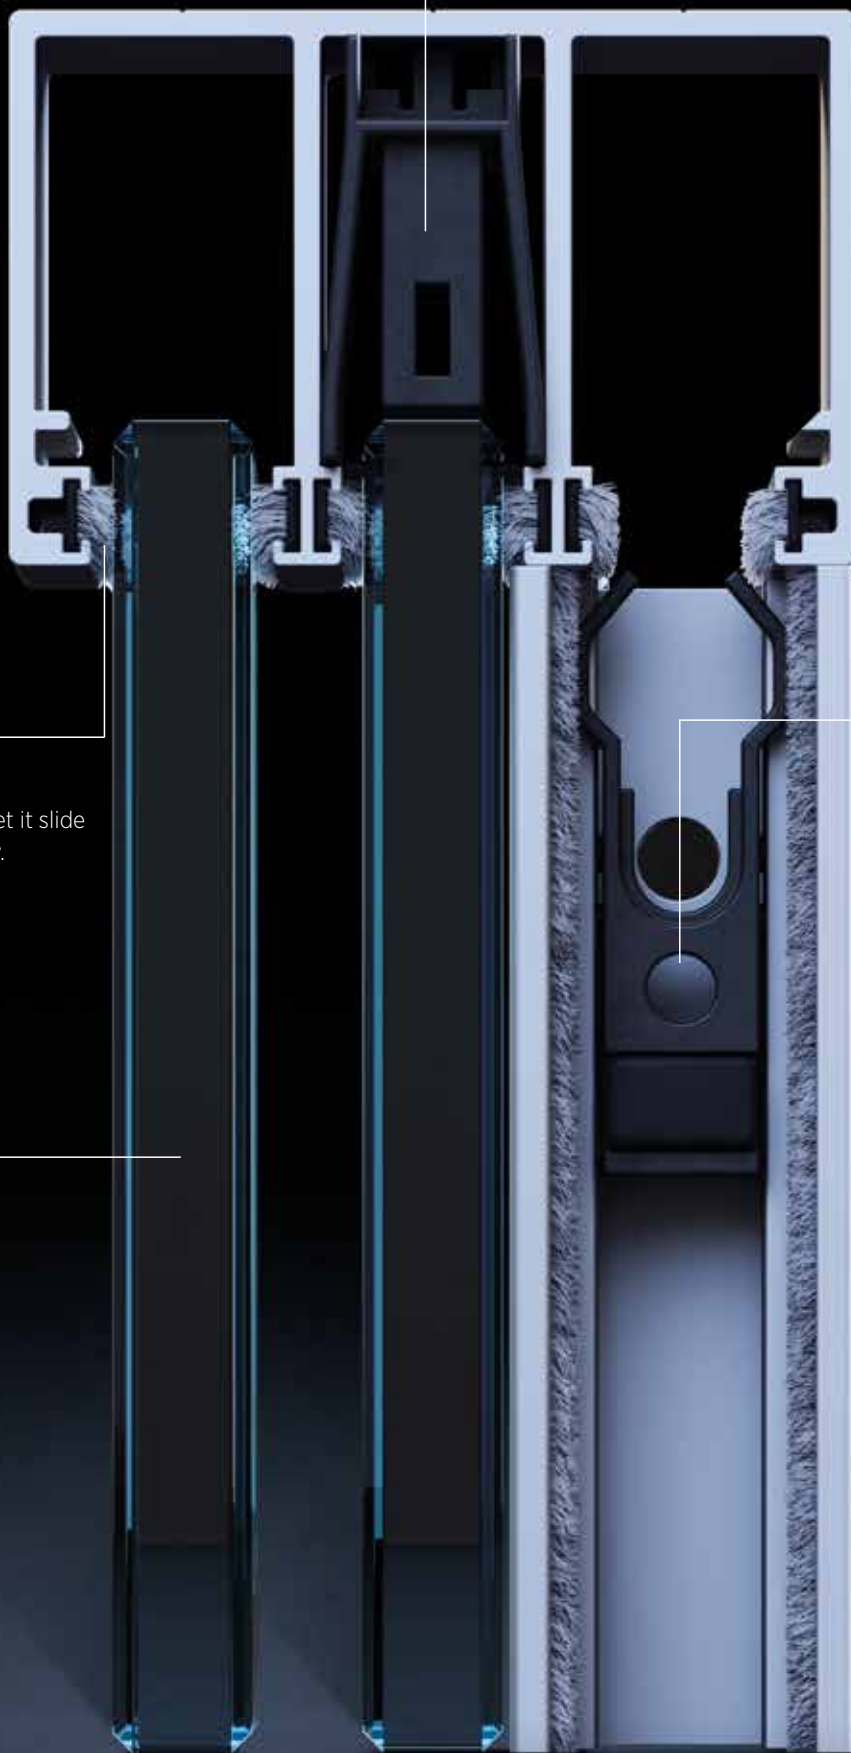

THE LOCKING SYSTEM.

Of course, we have also thought of a child-proof lock so that you can enjoy **SUNVIEW** completely undisturbed. The system can easily be locked from inside. Locking oneself out accidentally from outside is not possible. The locking mechanism only works once the system is closed. The wall profile also ensures a neat finish on the sides. The brushes protect and surround the glass.

A rubber buffer stops the glass in the right position.

Magnets hold the lock in the right position.


Red/green locking indicator

Brushes ensure a neat finish towards the glass.

THE FLOOR RAIL.

The contour of rollers and the running track perfectly match each other. That's why this fitting runs as if on clouds. The drivers are concealed and invisible to the user.

Our installation tip: We recommend countersinking the floor profile into the ground and mounting the rear side facing the terrace without drainage hole. In this way, the water flows back into the garden and does not reach the terrace.



Roller contour optimally aligned to the bottom guide. The system will be running for a long time like on the first day.

Driver

When pulling on one door, all other doors will follow along.

All running surface supports with drainage holes

Rear side

No drainage hole

YOUR PREFERENCES.

When designing **SUNVIEW**, our Crew has obviously also taken your preferences into account: You'll be as spellbound as the base profile comes prepared with an adhesive tape and only needs to be bonded to the door. By the way, all fittings are made of high-quality aluminium which is especially durable and easy to maintain.

The height adjustment lies concealed behind the end cap and only needs to be adjusted on the outside doors. In this way you can make sure that the glass door is perfectly matched to the wall profiles also under the most tedious conditions.

Adhesive tape prepared for a neat installation No silicone & no glass processing required

Height adjustment unobtrusively concealed behind end cap

Aluminium, powder-coated or anodised

Driver

When pulling on one door, all others will follow along.

THE HANDLE.

No matter if 2 or 5 tracks. The handle length has been adjusted to each system.

When opening one door, all others will follow along as well – but in this case via the door handle. A rubber protector is attached to the rear of the V2A stainless steel handle to safeguard the glass edge.

Stainless steel handles
made of V2A



Opening the Installation

All doors follow the movement
of the first door.

SUNVIEW

Sliding Door System for Outside Areas

Article number overview | Complete package
















Contents:

- | Cut to size and packed as a set
- | Ceiling profile, floor profile, wall profile
- | Locking prepared in both wall profiles
- | Accessory package with anti-lift device, stopper, assembly beetle
- | Additional height-adjustable runners in the two outer doors
- | Max. Width/door: 1500 mm
- | Max. Height/door: 2600 mm
- | Max. Rail length: 6000 mm
















Flexible Solutions for Individual Preferences.

Different opening varieties and door numbers with dimensions of up to 1.5 m width and 2.6 m height turn SUNVIEW into a true allrounder. The simplified installation onto the base or the floor enables time-saving and cost-efficient mounting.













MODELL #1 | SUNVIEW excl. lock and excl. driver

	2-tracks	3-tracks	4-tracks	5-tracks	
1-side type left					
Art. no. H=1700mm	30.1210.010.xx	30.1310.010.xx	30.1410.010.xx	30.1510.010.xx	
Art. no. H=2600mm	30.1210.000.xx	30.1310.000.xx	30.1410.000.xx	30.1510.000.xx	
1-side type right					
Art. no. H=1700mm	30.1215.010.xx	30.1315.010.xx	30.1415.010.xx	30.1515.010.xx	
Art. no. H=2600mm	30.1215.000.xx	30.1315.000.xx	30.1415.000.xx	30.1515.000.xx	
2-sides					
Art. no. H=1700mm	30.1220.010.xx	30.1320.010.xx	30.1420.010.xx	30.1520.010.xx	
Art. no. H=2600mm	30.1220.000.xx	30.1320.000.xx	30.1420.000.xx	30.1520.000.xx	

MODELL #2 | SUNVIEW excl. lock and incl. driver

	2-tracks	3-tracks	4-tracks	5-tracks	
1-side type left					
Art. no. H=1700mm	30.2210.010.xx	30.2310.010.xx	30.2410.010.xx	30.2510.010.xx	
Art. no. H=2600mm	30.2210.000.xx	30.2310.000.xx	30.2410.000.xx	30.2510.000.xx	
1-side type right					
Art. no. H=1700mm	30.2215.010.xx	30.2315.010.xx	30.2415.010.xx	30.2515.010.xx	
Art. no. H=2600mm	30.2215.000.xx	30.2315.000.xx	30.2415.000.xx	30.2515.000.xx	
2-sides					
Art. no. H=1700mm	30.2220.010.xx	30.2320.010.xx	30.2420.010.xx	30.2520.010.xx	
Art. no. H=2600mm	30.2220.000.xx	30.2320.000.xx	30.2420.000.xx	30.2520.000.xx	

MODELL #3 | SUNVIEW incl. lock and incl. driver

	2-tracks	3-tracks	4-tracks	5-tracks	
1-side type left					outside ↑ inside
Art. no. H=1700mm	30.3210.010.xx	30.3310.010.xx	30.3410.010.xx	30.3510.010.xx	
Art. no. H=2600mm	30.3210.000.xx	30.3310.000.xx	30.3410.000.xx	30.3510.000.xx	
1-side type right					outside ↑ inside
Art. no. H=1700mm	30.3215.010.xx	30.3315.010.xx	30.3415.010.xx	30.3515.010.xx	
Art. no. H=2600mm	30.3215.000.xx	30.3315.000.xx	30.3415.000.xx	30.3515.000.xx	
2-sides					außen ↑ innen
Art. no. H=1700mm	30.3220.010.xx	30.3320.010.xx	30.3420.010.xx	30.3520.010.xx	
Art. no. H=2600mm	30.3220.000.xx	30.3320.000.xx	30.3420.000.xx	30.3520.000.xx	

Optional

Flush Handle, round
dimension: Ø 65 mm
height: 6 mm
Extra flat design,
self-adhesive, no glass
processing required



32.0011.065.12



32.0021.065.12

Door handle
made of V2A with driver
function for opening the
unit, Handle requires
drilling hole Ø 30 mm



30.0300.035.21



30.0313.035.21



30.0314.035.21



30.0315.035.21


Door lock
V2A
for 2-sided systems
(optional)




30.0230.000.21




2 TRACKS

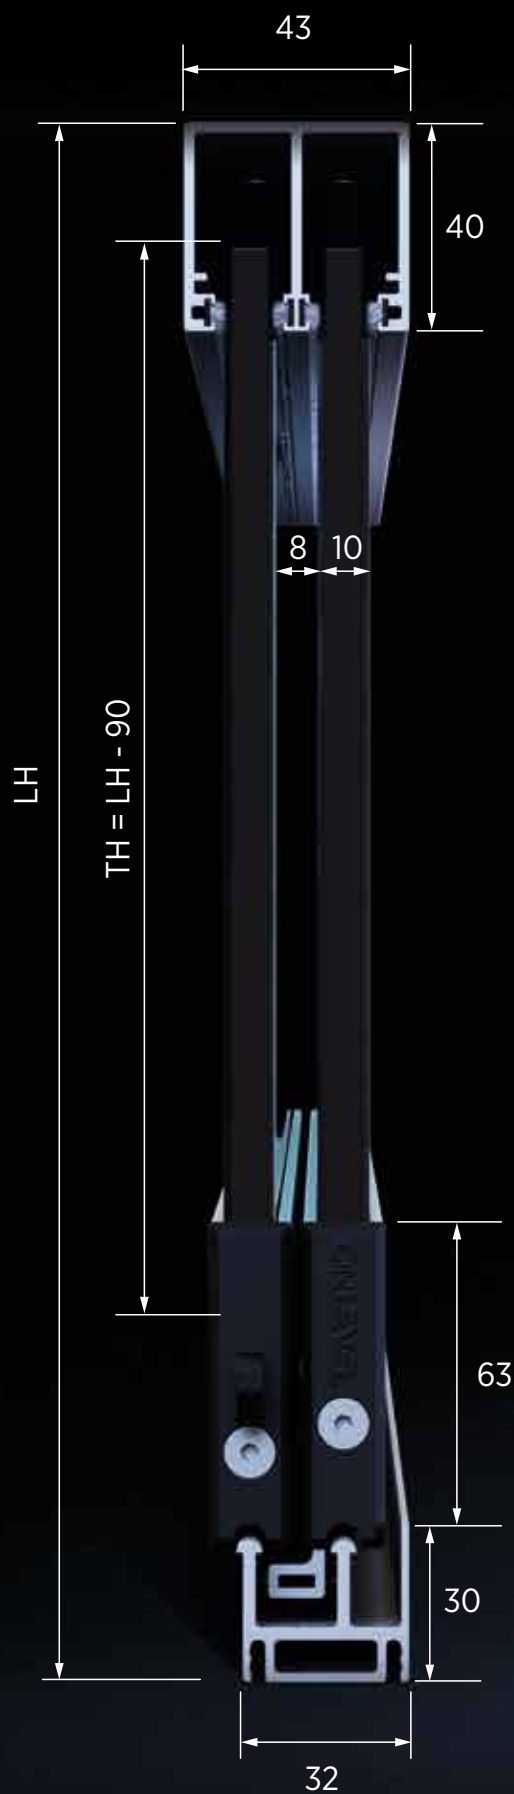


3 TRACKS

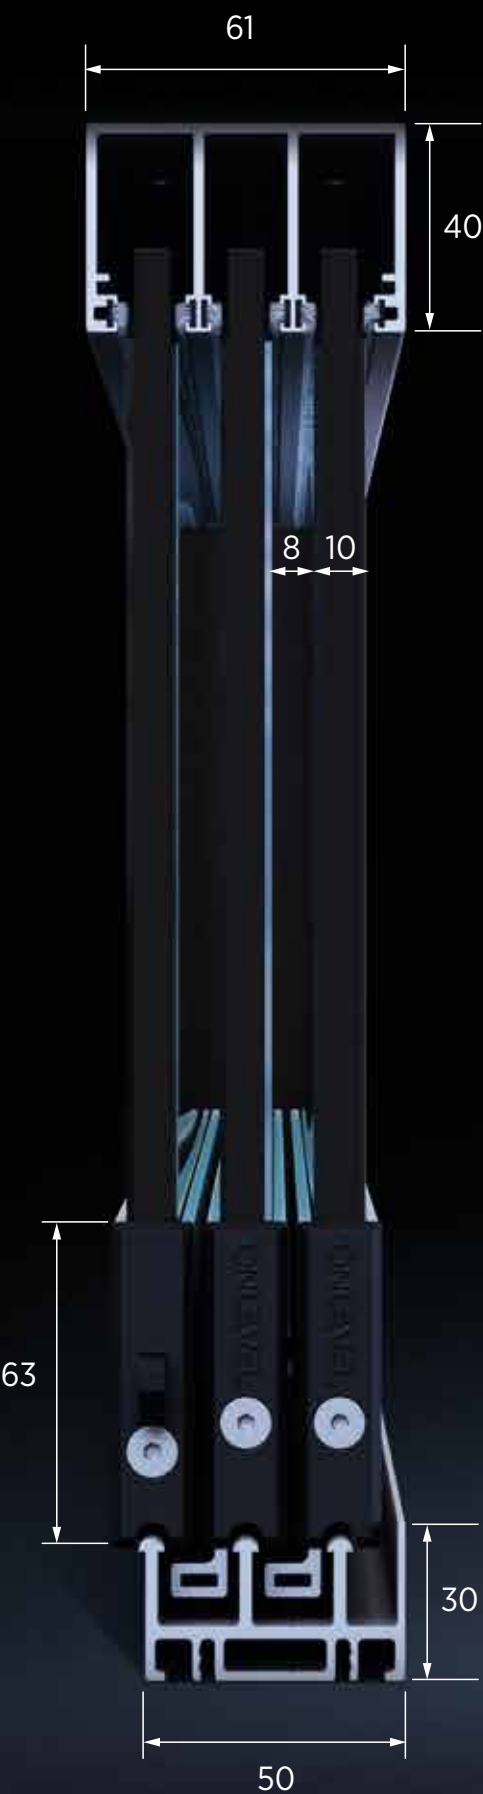

4 TRACKS

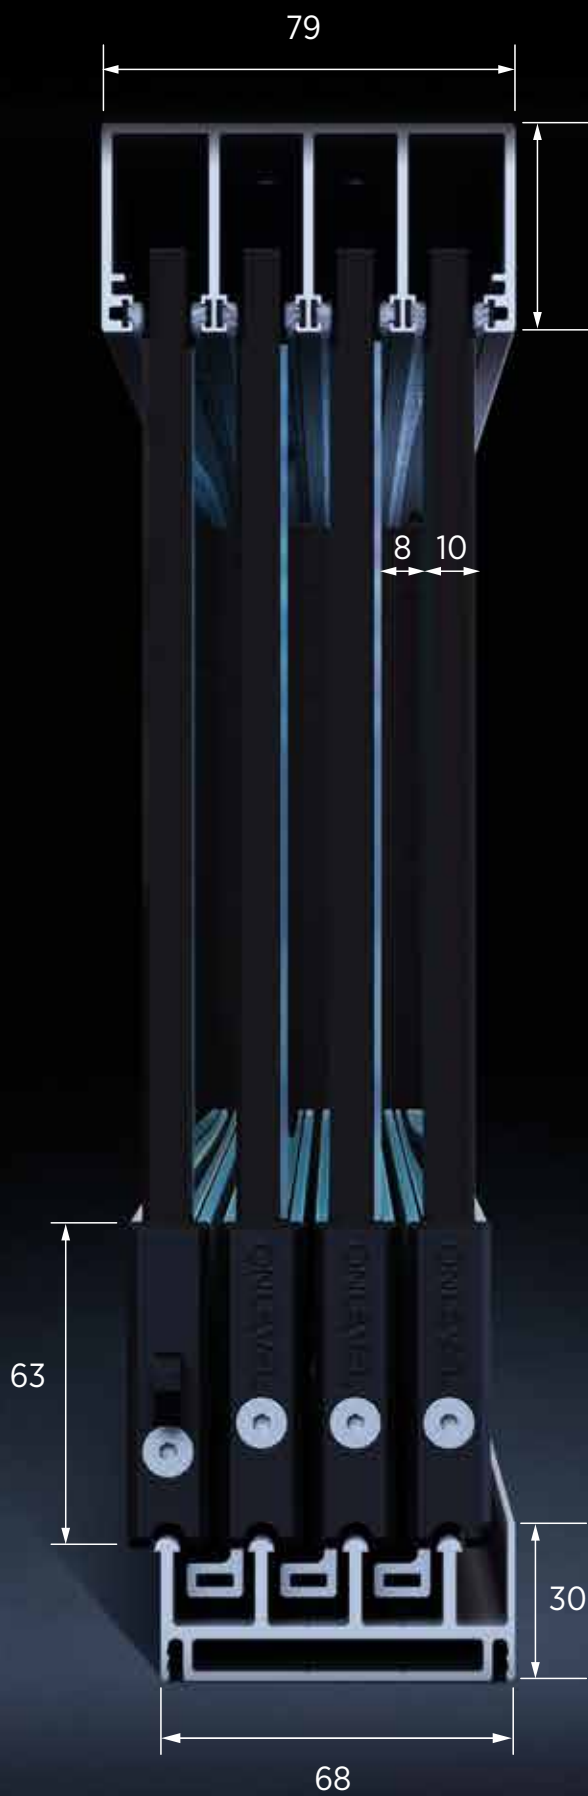

5 TRACKS

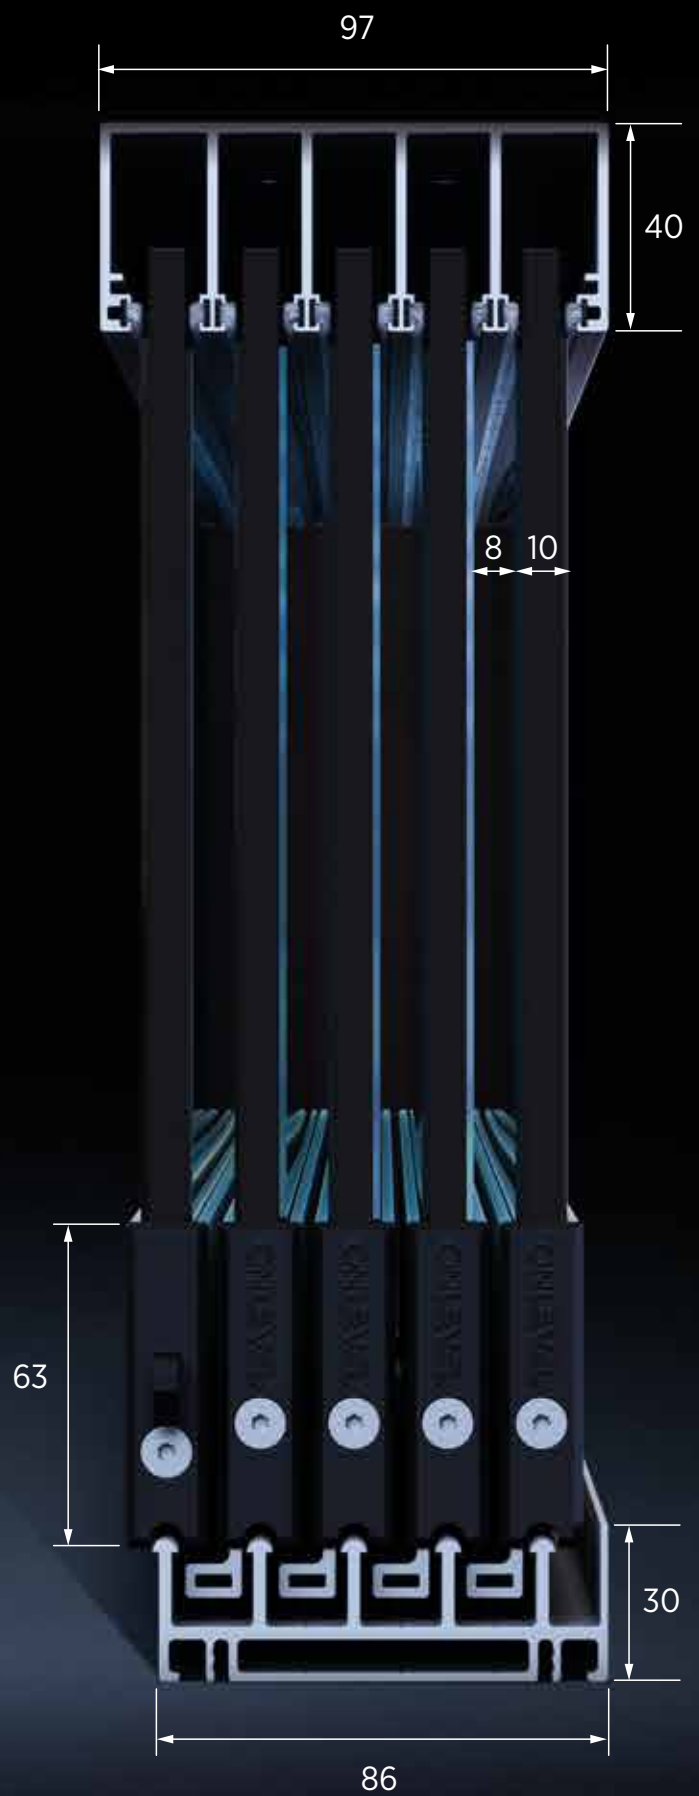


Brush Seal



Reduces airflow between the panes

- | for glass 10mm
- | L = 3000mm
- | Plastic transparent




Model	
Seal	Art. no.
	30.9020.003.40

SunView door seal with bellows



Reduces airflow between the panes

- | for glass 10mm
- | L = 2800mm
- | Plastic transparent




Model	
Seal	Art. no.
	23.7006.013.40

SunView door seal 90* with magnet



Reduces airflow between the panes

- | for glass 10mm
- | L = 2800mm
- | Plastic transparent




Model	
Seal	Art. no.
	23.7101.013.40

SunView door seal 180° with magnet



Reduces airflow between the panes

- | for glass 10mm
- | L = 2800mm
- | Plastic transparent

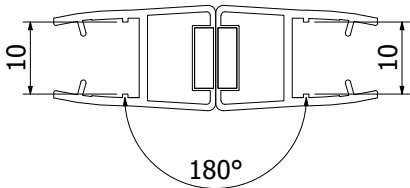

Model	
Seal	Art. no.
	23.7103.013.40

Glass mounting strip




| 15 x 1mm
| L= 33 m
| transparent

Model	
Seal	Art. no.
	90.7008.151.00


Mounting-Tool



Easy to handle and an indispensable helper during assembly.



Model	
Tool	Art. no.
	90.0100.230.00

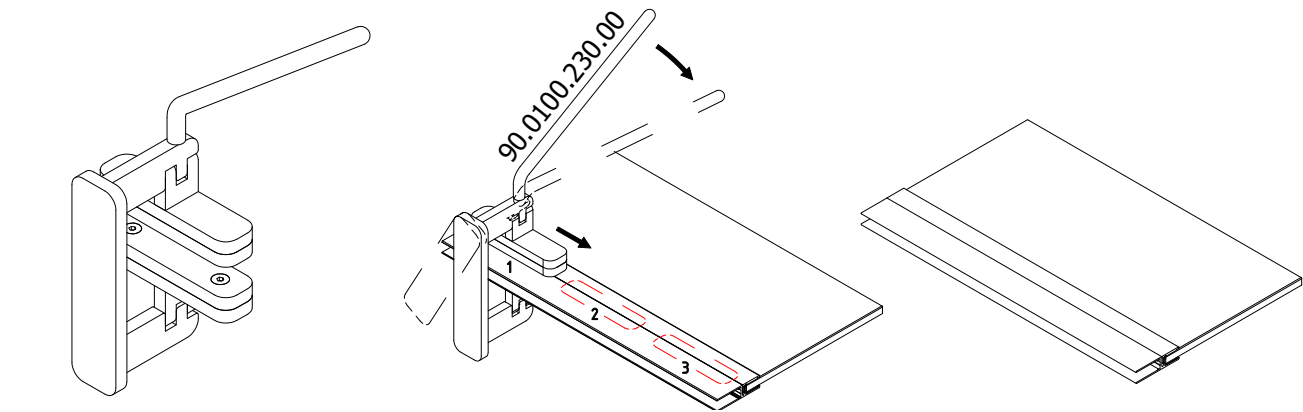

Sunview Demo



Demo	Art. No.
3-tracks	81.0103.000.11
4-tracks	81.0104.000.11
5-tracks	81.0105.000.11







ONLEVEL

ONLEVEL Ltd. | Unit 7, Alexandria Court | Alexandria Drive
Ashton Commerce Park | Ashton-under-Lyne | Lancashire OL7 0QN | United Kingdom
T +44 0161 804 9500 | F +44 0161 804 9505 | info@onlevel-uk.com | www.onlevel.com