The image shows a modern office space viewed through a large glass partition. Inside the office, there is a desk with a computer monitor, an ergonomic chair, and a small table with a plant. A large armchair is also visible. The office has large windows with light-colored curtains. The ceiling is white with recessed lighting. The overall aesthetic is clean and professional.

ONLEVEL

**KAZIWALL**

RUM HØJDE GLASVÆRN / ROM  
HØYDE GLASSREKKVERK

# KAZIWALL

Rum højde glasværn/rom højde glassrekkverk til indendørs og udendørs brug

## KAZIWALL


Opdeling er normalt ikke godt, men hos **ONLEVEL** kan vi lave dem smukke. **KAZIWALL** hjælper dig med rumdeling, hvis du ønsker at kunne bevare overblikket omkring dig.


**KAZIWALL** er velegnet som lyddæmpning/støjbekyttelse.

**KAZIWALL** er den ultimative rumdeler/romdeleren. Velegnet/egnet til indendørs og udendørs brug og fås/tilgængelig med faldsikring. Fungerer som rumdeler/romdeler i flere etager/etasjer, eller som vindskærm/vindskjerm på balkoner/balkonger eller terrasser.

## Væsentlige egenskaber

- | Nem/enkel og sikker installation til enkelt glas/glasss fikseringsmetode
- | Maksimal loftshøjde/takhøjde 3.0 m
- | Hvis faldbeskyttelse, max. belastning 1.5 kN/m
- | Top montering til både loft/tak og gulv
- | Til glastykkelse 16.76 mm, 17.52 mm og 21.52 mm
- | Glasbredde minimum 1000 mm
- | Præfabrikeret/prefabrikkert system

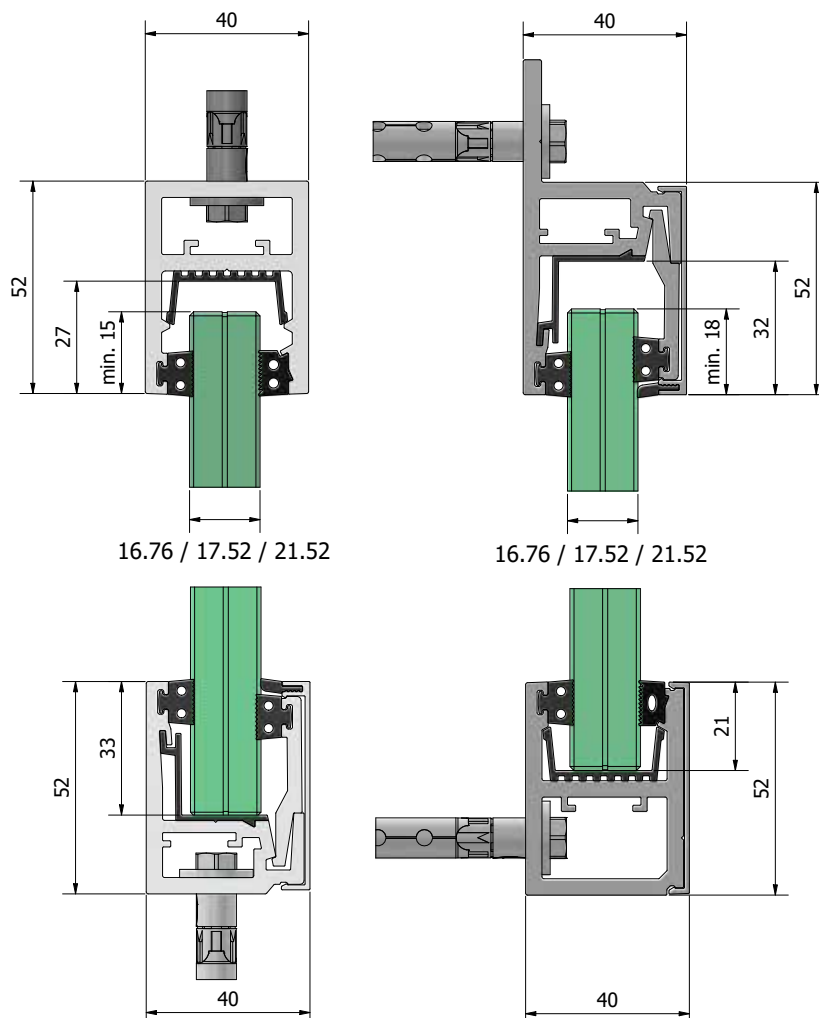



Plug and Play System

Faldbeskyttelsessystem

Nem/enkel installation. Præfabrikeret System.

# KAZIWALL | TOP

## KAZIWALL Top



| Præfabrikeret/Prefabrikkert System  
| 1-stk top montage/monterings profil  
| Salgsenhed: 1 stk

		Rå aluminium	Naturanodiseret	Valgfri RAL farve
Længde	Glasstykkelse	Varenr.	Varenr.	Varenr.
2500 mm	10,76 mm / 12,76 mm	20.4002.011.10	20.4002.011.11	20.4002.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4005.011.10	20.4005.011.11	20.4005.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4002.017.10	20.4002.017.11	20.4002.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4005.017.10	20.4005.017.11	20.4005.017.13/16/18/19
2500 mm	21,52 mm	20.4002.022.10	20.4002.022.11	20.4002.022.13/16/18/19
5000 mm	21,52 mm	20.4005.022.10	20.4005.022.11	20.4005.022.13/16/18/19

## KAZIWALL Top 2-delt



| Præfabrikeret/Prefabrikkert System  
| 1-stk top montage/monterings profil  
| Salgsenhed: 1 stk


OBS: Mellem/mitten-profiler i L=900 mm  
for at fastgøre/å fæste hvert glaspanel separat

		Rå aluminium	Naturanodiseret	Valgfri RAL farve
Længde	Glasstykkelse	Varenr.	Varenr.	Varenr.
2500 mm	10,76 mm / 12,76 mm	20.4502.011.10	20.4502.011.11	20.4502.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4505.011.10	20.4505.011.11	20.4505.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4502.017.10	20.4502.017.11	20.4502.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4505.017.10	20.4505.017.11	20.4505.017.13/16/18/19
2500 mm	21,52 mm	20.4502.022.10	20.4502.022.11	20.4502.022.13/16/18/19
5000 mm	21,52 mm	20.4505.022.10	20.4505.022.11	20.4505.022.13/16/18/19

## KAZIWALL Side væg profil



| Præfabrikeret/Prefabrikkert System  
| Længde/Lengde: 3000 mm  
| Salgsenhed: 1 stk




	Rå aluminium	Naturanodiseret	Valgfri RAL farve
Glasstykkelse	Varenr.	Varenr.	Varenr.
10,76 mm / 12,76 mm	20.5003.011.10	20.5003.011.11	20.5003.011.13/16/18/19
16,76 mm / 17,52 mm	20.5003.017.10	20.5003.017.11	20.5003.017.13/16/18/19
21,52 mm	20.5003.022.10	20.5003.022.11	20.5003.022.13/16/18/19

## KAZIWALL Endekappe



| Salgsenhed: 8 stk

Farve	Art. no.
Rå aluminium	20.9010.000.10
naturanodiseret	20.9010.000.11
RAL blank	20.9010.000.13
RAL strukturlak	20.9010.000.16
RAL mat	20.9010.000.18
ARMOR RAL	20.9010.000.19



## KAZIWALL SIDE



| Præfabrikeret/Prefabrikkert System  
| Salgsenhed: 1 stk

		Rå aluminium	Naturanodiseret	Valgfri RAL farve
Længde	Glasstykkelse	Varenr.	Varenr.	Varenr.
2500 mm	10,76 mm / 12,76 mm	20.4102.011.10	20.4102.011.11	20.4102.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4105.011.10	20.4105.011.11	20.4105.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4102.017.10	20.4102.017.11	20.4102.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4105.017.10	20.4105.017.11	20.4105.017.13/16/18/19
2500 mm	21,52 mm	20.4102.022.10	20.4102.022.11	20.4102.022.13/16/18/19
5000 mm	21,52 mm	20.4105.022.10	20.4105.022.11	20.4105.022.13/16/18/19

## KAZIWALL SIDE 2-delt



| Præfabrikeret/Prefabrikkert System  
| Salgsenhed: 1 stk


OBS: Mellem/mitten-profiler i L=900 mm  
for at fastgøre/å feste hvert glaspanel separat

		Rå aluminium	Naturanodiseret	Valgfri RAL farve
Længde	Glasstykkelse	Varenr.	Varenr.	Varenr.
2500 mm	10,76 mm / 12,76 mm	20.4602.011.10	20.4602.011.11	20.4602.011.13/16/18/19
5000 mm	10,76 mm / 12,76 mm	20.4605.011.10	20.4605.011.11	20.4605.011.13/16/18/19
2500 mm	16,76 mm / 17,52 mm	20.4602.017.10	20.4602.017.11	20.4602.017.13/16/18/19
5000 mm	16,76 mm / 17,52 mm	20.4605.017.10	20.4605.017.11	20.4605.017.13/16/18/19
2500 mm	21,52 mm	20.4602.022.10	20.4602.022.11	20.4602.022.13/16/18/19
5000 mm	21,52 mm	20.4605.022.10	20.4605.022.11	20.4605.022.13/16/18/19

## Fischer - Ankerbolt - FH II 10/10 S AISI 316



- | Til udendørs brug
- | Salgsenhed: 50 stk
- | Nødvendige ankerbolt:  
2,5 m: 13, 5 m: 25

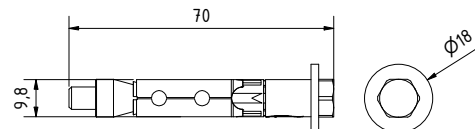


### Varenr.

91.3521.010.30

## Fischer - Ankerbolt - SXRL 10x60 FUS galvaniseret stål plated



- | Til indendørs brug
- | Salgsenhed: 50 stk
- | Nødvendige ankerbolt:  
2,5 m: 13, 5 m: 25

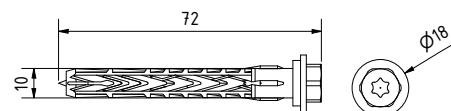

### Varenr.

91.3581.060.81

## Tape 69



- | Særligt velegnet til applikationer, hvor der kræves en transparent, fleksibel binding.
- | Længde: 12 mtr., Tykkelse: 3mm
- | Pakning: 1 stk.

Model 7025		
Breite	Glasdicke	Varenr.
5 mm	8 - 8.76 mm	90.7025.008.03
7 mm	10 - 10.76 mm	90.7025.010.03
9 mm	12 - 12.76 mm	90.7025.012.03
13 mm	16.76 - 17.52 mm	90.7025.016.03
17 mm	20.76 - 21.52 mm	90.7025.020.03

## Tape montageværktøj/monteringsverktøy



- | Salgsenhed: 1 stk

Model 0100	
Til glas tykkelse	Varenr.
8/8.76 and 10/10.76 mm	90.0100.170.08
12/12.76 and 16.76/17.52 mm	90.0100.170.12
16.76/17.52 and 20.76/21.52 mm	90.0100.170.16


## KAZIWALL Værktøj / Verktøy

| Salgsenhed: 1 stk




Varenr.

90.0100.190.00

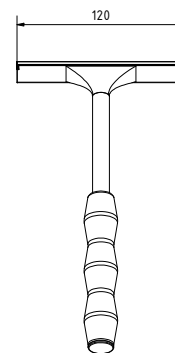


### Funktion 1:

Værktøj/verktøy til støtte under montering af profil

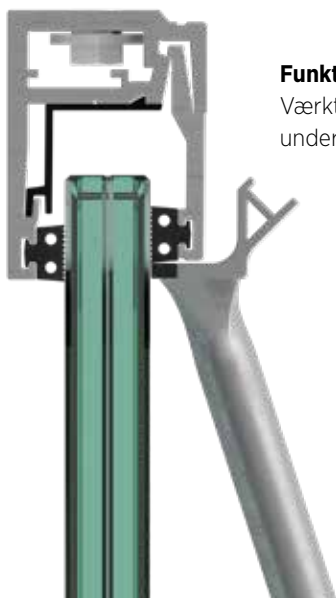

### Funktion 2:

Afmontering af dekkappe

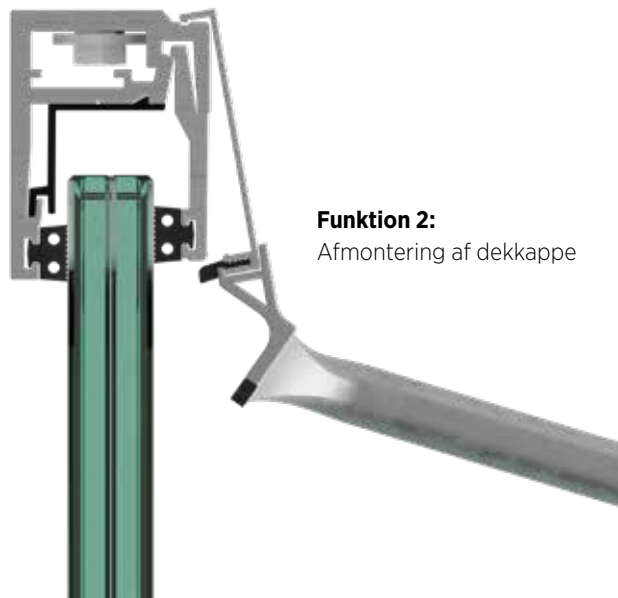

## Brugsdata i henhold til belastningskapacitet

### Indendørs (Indervæg/Indre vegg)

	Lineær belastning	Glastykkelse	Højde/højde (max)
Privat	0.5 kN/m	16.76 mm / 17.52 mm	3000 mm
Offentlig	1.5 kN/m	21.52 mm	3000 mm

### Udendørs (som del af ydermur/yttervegg)

	Lineær belastning	Glastykkelse	Højde/højde (max)	qp(z) max.
Privat /Offentlig	1.5 kN/m	21.52mm	2600 mm	1.41 kN/m2
Privat /Offentlig	1.5 kN/m	21.52 mm	3000 mm	0.93 kN/m2

\*Alle glas beregninger er gjort/utført for lamineret hærdet/herdet glas (ESG)



A modern interior staircase with wide, light-colored concrete steps. The staircase is enclosed by a glass railing system with wooden handrails. The railing is made of clear glass panels held by metal brackets. The wooden handrails are mounted on the wall and the glass panels. The staircase is set against a white wall. There are several potted plants around the staircase, including a large aloe vera plant on the left and a smaller plant on the right. The floor is made of light-colored wood. The overall design is clean and minimalist.

# ONLEVEL

**ONLEVEL Nordic Aps** | Gunnar Clausens Vej 26B | 8260 Viby J | Danmark  
+45 69 14 38 00 | [sales@onlevel-nordic.com](mailto:sales@onlevel-nordic.com) | [www.onlevel.com](http://www.onlevel.com)